


# saddle

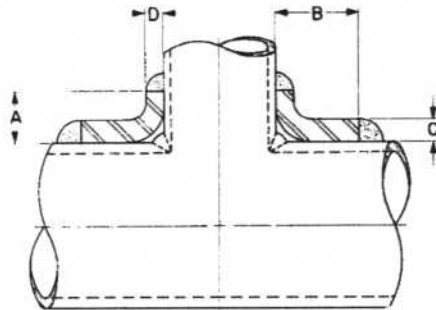

dimensions: All dimensions in inches and are in accordance with ASA B16.9 and MSS-SP-48 where established.

pressure-temperature rating: Identical with those of seamless pipe of same size, thickness, and material grade.

footnotes: \*Pipe schedule numbers in accordance with ASA B36.10.  
 ▲This size and thickness does not correspond with any schedule number.

nominal size of nozzle	nominal header sizes	dimensions				weight▲ (approx) lb
		A	B	C	D	
1/4	1/4 to 48	3/8	3/4	3/16	1/32	.5
1/2	1/2 to 48	13/16	3/8	3/16	1/32	.5
3/4	3/4 to 48	13/16	1 1/4	3/16	1/32	.75
1	1 to 48	7/8	1 3/4	3/16	1/32	1
1 1/4	1 1/4 to 48	1 1/4	1 3/8	3/16	1/32	1
1 1/2	1 1/2 to 48	1 1/2	1 3/4	1/4	3/16	2
2	2 to 48	1 1/2	2 1/8	1/4	3/16	3
2 1/2	2 1/2 to 48	1 5/8	2 1/8	3/32	3/16	4
3	3 to 48	1 3/4	2 1/4	3/16	13/32	5
3 1/2	3 1/2 to 48	1 3/4	2 1/4	3/16	13/32	6
4	4 to 48	1 3/4	2 1/2	11/32	3/8	7
5	5 to 48	2	2 3/4	3/8	3/8	12
6	6 to 48	2 3/8	3 1/4	3/16	1/2	22
8	8 to 48	2 3/4	4 1/4	3/16	1/2	33
10	10 to 48	3	5	3/16	1/2	45
12	12 to 48	3 3/4	6	3/16	1/2	57
14 OD	14 to 48	4	6	3/16	1/2	76
16 OD	16 to 48	4 1/4	7 1/4	3/16	1/2	107
18 OD	18 to 48	4 1/4	7 1/4	3/16	5/8	152
20 OD	20 to 48	5 1/4	7 3/4	3/16	3/8	163
24 OD	24 to 48	6	9 1/2	3/16	3/8	248